

MAC APPLICATIONS FOR KOMATSU®

MEGA ARTICULATED TRUCK TANK



EQUIPMENT •

PARTS **()**

SUPPORT ()



THERE'S WORK TO BE DONE



For over 45 years, Mega has been providing specialty haulage equipment for use in construction and mining operations. Our water haulage equipment, service bodies, bottom-dump trailers, equipment transports and other products are designed and manufactured to be reliable and durable machines. The knowledge and experience that comes from delivering over 6,000 machines is built into every product we make.

Our employees take pride in their workmanship and Mega has developed a reputation for manufacturing quality products that are built to last. Our sales and product support staff are known for providing solutions and demonstrating integrity throughout the ownership experience. Our product's value is reflected in our industry-leading brand recognition and resale value – Genuine Mega products have become the standard by which others are measured.

Mega products, parts and service can be found at OEM construction and mining equipment dealers around the world. Our sales and product support departments at Mega are available to help answer your questions. For more information, please contact us @ +1 505.345.2661 or toll free in the USA at 1.800.345.8889 or on the web at www.megacorpinc.com.

There's work to be done – and, from all of us at Mega, we want to help you do it!



Jim Kunz
President Emeritus







> VALUE

- The water tank is essential to the operation of production tools
- Mega water tanks provide the highest levels of dependability and longevity
- The high quality Mega water tank provides a lower cost of ownership and more profit from production tools
- Mega water tanks compliment the premier brands of prime movers
- The superior longevity of Mega water tanks provides high resale value lowering the cost of ownership



DESIGN AND MATERIALS

- Mega works closely with OEM manufacturers to ensure our tanks properly fit, load, and interface with the prime mover resulting in a fully integrated machine
- Mega tanks meet or exceed applicable ISO/SAE/DOT recommended practices and requirements
- Materials and components used in the manufacture of Mega water tanks are chosen for high quality and durability rather than a low price point
- Mega water tanks feature the best interior baffling systems on the market resulting in a machine that is safe to operate with lower operating costs
- Key spray components are specifically engineered for severe duty heavy equipment service
- Mega spray system controls are designed to withstand the harsh corrosive environment of heavy construction and surface mining
- Mega water pumps are specifically designed for heavy equipment water tank service with features not found on standard off the shelf irrigation water pumps
- Mega spray heads (100% built in the USA) are the heaviest duty, most versatile, valve and spray fan nozzle on the market



> PRODUCT SUPPORT

- Our dealer relationships and a fully integrated machine provide seamless support and the highest level of machine availability
- Mega is the most recognized and valuable brand of tank on the market
- Over 40 years of knowledge and experience with prime mover integration
- Every Mega water tank includes a full set of Operation and Service Manuals
- www.megacorpinc.com provides useful information and complete contacts for support
- Phone, online and on-site support for dealers and end users with 24 hr/day parts and advice to ensure seamless machine support
- Unsurpassed product warranties and dealer support



Mega manufactures a complete line of water tanks for Komatsu® articulated prime movers. Mega offers these products for dealer installation in kit form (MAC) and requires a dealer/customer supplied truck chassis. Factory installation and testing are available on some models which may be shipped assembled from our factory in Albuquerque, N.M. depending on customer requirements and truck model.

Every tank includes full manuals for installation, operation, maintenance, and parts. Mega tanks are constructed with premium materials and are inspected throughout the manufacturing process to produce the best water tanks and spray systems available.

Mega stocks a complete line of service and repair parts. Orders can be placed on-line through our website or by phone. Our Mega Product Support team is available to assist with all facets of installation on-site, by phone, or e-mail. Speak with your Mega sales representative for complete details.


Available Mega MAC Water Tanks for KOMATSU® Articulated Trucks MEGA MODEL NOMINAL CAPACITY PRIME MOVER CHASSIS CONFIGURATION MAC6 23,000 liters/6,000 Gallons HM300 ADT Standard Wheelbase MAC6 FB* 23,000 liters/6,000 Gallons HM300 ADT Standard Wheelbase Flat Bottom MAC8 32,000 liters/8,700 Gallons HM400 ADT Standard Wheelbase


For other tractor models and custom sizes please contact Mega or your local dealer for more information. Sizes and models subject to change.

Our M.A.S.S. (Mega Anti Surge System) baffling provides the most stable, lowest profile, and longest-life tank on the market today. Chassis life is improved and maintenance decreased because our tanks are engineered in collaboration with Komatsu® to match their ROPS*, braking, and chassis load ratings. Mega tanks are designed with safety, performance, and durability in mind which ensures load stability, standard machine handling, and long chassis service life.

Mega tanks feature a proprietary baffling system that minimizes the effects of surging water while maximizing tank longevity. The tank mounting system utilizes line-bored rear pin mounts and flexible clamp front mounts that require no welding, making tank installation and removal simple. For more information on our rigid -frame water tanks please visit our website @ www.megacorpinc.com/equipment/water-articulated.asp

While Tanks May Look Similar On The Outside- It's What's Inside That Counts!

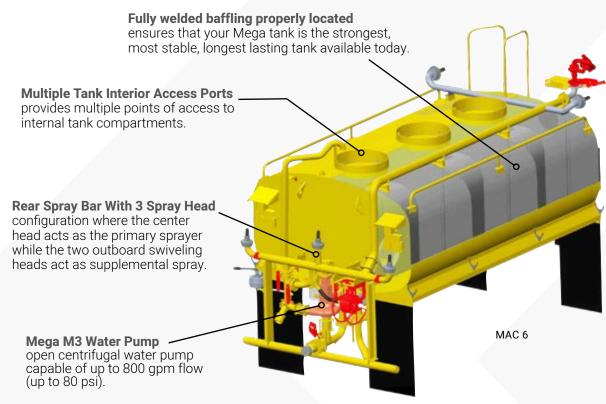

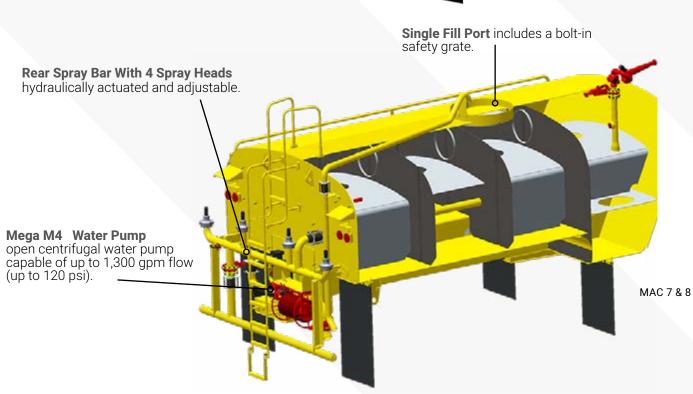

GENUINE MEGA

^{*} FB-Flat Bottom

STANDARD FEATURES

Standard features for Mega Articulated Truck Tank are subject to change and can vary by the type or model of tank. Availability of features may also vary by model. If you have any questions please contact your Mega sales representative at 505-345-2661 or toll free at 1-800-345-8889.

	QUICK REFERENCE DIRECTORY	HNIT MAC	MAC MAC
_			
		6	8
	Access Ladder With Hand Rails	/	/
	Anti-Surge Baffling System (M.A.S.S.)	/	/
	Camera Relocation Mounting Provision*	/	/
	Direct Pin Mounting With Line-Bored Holes	/	/
	Digital Spray Control System-DiSCS®		
	Electro-Hydraulic Spray Control System		
	Exterior Paint	/	/
	External Water Lines	/	
	Fill Port with Safety Grate & Anti-Skid Walkway 30 inch	~	
	Fill Port with Safety Grate & Anti-Skid Walkway 36 inch		/
	Flexible Front Mounting	/	/
	Hydraulic Oil Cooler	/	/
	Internal Water Lines		~
	LED Lighting and Utility Lights	✓	~
	M3 Series High Performance Water Pump	~	
	M4 Series High Performance Water Pump		/
	Mud Flaps	/	~
	One Year Warranty	/	/
	Rear Spray Bar With 3 Spray Heads	~	
	Rear Spray Bar With 4 Spray Heads		~
	Technical Manuals	~	~
	Water Level Indicators	~	/



MEGA DIGITAL SPRAY CONTROL SYSTEMFLEXIBLE, SMART, RUGGED

There is a growing demand for precise application of water spray for dust suppression in surface mining, and construction applications to promote water conservation and operator safety. To address these issues Mega has designed the DiSCS® - Digital Spray Control System.

DiSCS® utilizes CAN Bus* technology to operate the spray control system controlling the water pump, water spray, and water actuation. When combined with our GPS, DiSCS® provides a method to automatically regulate the amount of water spray applied relative to vehicle ground speed or distance traveled.



The DiSCS® compact switchpad is based on CAN Bus protocol and is water and dust resistant. The LED switchpad lights up with the many different watering patterns and controls.

- Simple and rugged construction for heavy-duty operation
- Adjustable switchpad brightness
- RAM® mount (where applicable) is fully adjustable to any operator
- In-cab water level indicating system
- Total system pause function
- Work light and auxiliary controls
- Durable switchpad legend inserts

DISCS® SPRAY SYSTEM FEATURES AND BENEFITS



Distance-Based Spraying (Checkerboard)

Alternating intermittent watering patterns reduces water consumption and ensures one steering tire and one drive tire remain on a dry surface.



GPS

Distance and speed-based operation modes utilize a GPS-based speed signal to automatically stop/start water flow when the vehicle stops/starts moving, while in GPS mode.



Speed-Based Spraying (Continuous Coverage)

Sequence-based intermittent spray system operation uses Pulse Width Modulation (PWM) to vary the amount of water flow while maintaining a continuous rate of water application, independent of speed.



Time Based Spraying (Banding)

Operator adjustable, full width, intermittent wet/dry pattern.



Manual Spraving

The system can be operated manually independent of GPS signal.

DISCS® SPRAY SYSTEM FEATURES AND BENEFITS



Reliability

DiSCS® utilizes Mega water pump, hydraulic motor, Mega spray heads, and electro-hydraulic controls. There are no complex modifications to the vehicle's hydraulic systems or powertrain.



Versatility

DiSCS® is adaptable to most, if not all, pieces of water equipment found worldwide. DiSCS® can be easily installed in the field on machines originally equipped with a Mega spray system, or can be retrofit to many older models equipped with a competitor's spray systems.



DiSCS® Retro-Fit Kits

Mega DiSCS® spray control can be applied to virtually any older Mega or competitor's water distribution equipment offering these advantages:

- Standardized operator and maintenance training.
- Genuine Mega Product Support and parts (also available on-line, and documentation).
- Readily available repair and maintenance components, common to most Mega water distribution products.

STANDARD DISCS® SUPERBOX FEATURES

The DiSCS® Superbox is a water-tight, sealed compartment with weather-proof rating built for rugged use in the harshest environments for mining and construction.



Photo includes optional equipment, sold separately.

- The Superbox consolidates the hydraulic system solenoid logic controls in a weather-proof, easy-to-access enclosure that securely protects critical components.
- Externally-mounted system filter assembly to protect hydraulic control valves.
- Logic control modules include individual fusing and self-diagnostics to assist in troubleshooting.
- Durable wiring harness with Deutsch® connections throughout. Harness includes additional pre-wired functions for easy plug-and-play of additional functions.

WATER PUMP PROTECTION FEATURES FOR DISCS®

✓ Soft Start/Stop

System controlled soft starts/stops to protect against operator induced sudden starts and stops that can decrease drive motor and water pump service life.

✓ Low water

Automatic soft-stop when low water level is detected which prevents the dry running of the water pump.

Overheating

Automatic soft-stop after extended water pump operation with spray heads and water cannon valves closed (no water flowing from the pump).

GPS SYSTEM FOR DISCS®

The DiSCS® Global Positioning System (GPS) works with existing DiSCS® 2.0 Mega spray system hardware which includes water pump, hydraulic motor, spray heads, and DiSCS® 2.0 electro-hydraulic controls. A self-contained GPS unit is used to determine ground speed.



GPS-Based Sensing

DiSCS® uses GPS data to determine ground speed, the GPS system is universal, there is no special application-specific engineering required and the system is not vulnerable to interference like radar-based systems.



Self-Contained

DiSCS® does not require connections to other vehicle systems to determine speed. Easily adaptable to a wide variety of machine applications.



Automatic Water Consumption Reduction

The DiSCS® system utilizes a pulsing strategy, to automatically limit the amount of water consumed, based on vehicle speed while maintaining road dust control coverage. Utilizing the pulsing strategy avoids the addition of complex and costly variable flow hydraulic systems and the resulting impact on machine reliability. Multiple application choices are available-continuous water layer, checker boarding and operator selectable.



Automatic Shut-off

In GPS mode the system automatically shuts off the flow of water as the vehicle comes to a stop to prevent puddling. Spraying automatically resumes as the machine begins to move again.



MEGA ELECTRO-HYDRAULIC CAB CONTROL

The in-cab spray control module provides independent control of each spray head, water valve, and optional accessories. Included in the cab control module is an LED water level indicator. Our control module is built for rugged use in the harshest environments of mining and construction.

Electro-Hydraulic Spray Control System

For the most demanding mining and construction environments we provide the Mega electro-hydraulic spray control system. The cab control module operates our Mega proprietary hydraulic solenoid spray control module that individually actuates all spray head valves and water valves. The spray control system operates independently from the water pump drive circuit. The solenoid module is housed in a weather tight steel housing. Mega fully supports these systems with spare parts and full time Product Support.



MEGA Cab Control



Water Level Indicators

There are two electronic water level indicators, one in the cab control module inside the cab and the other on the solenoid control module mounted on the tank for easy viewing while filling.

MEGA WATER PUMPS

The heart of the Mega spray system is the water pump. The water pump is powered by the vehicle's hydraulic system. Mega spray controls ensure proper integration with the chassis' hydraulic system and ECM.

The Mega M3 series heavy-duty water pump features a direct bolt-on hydraulic motor mount and steel splined coupling to simplify drive motor connection. Heavy-duty shaft and dual bearing design provide long life and high water output for superior spray pattern and water cannon performance.

The Mega M4 series high performance water pump also features direct bolt-on hydraulic motor mount and steel splined coupling to simplify drive motor connection. The vented frame cavity prevents damage from over-greasing and allows the use of an auto lubrication system. The M4 pumps are available in both standard cast iron as well as corrosion-resistant models with stainless steel waterways and fully stainless steel.



MEGA M3 Series



MEGA M4 Series



MEGA M4 Series Complete Stainless Steel



MEGA SPRAY HEAD VALVES



Mega Hydraulic Spray Heads

The Mega hydraulic spray head valve utilizes a custom-made, high quality, heavy-duty, double-acting hydraulic cylinder to open and close the valve portion of the spray head. This spray head is suitable for any heavy equipment prime mover, and requires a hydraulic spray control system.

HAVE CORROSIVE WATER?

WE OFFER COMPLETE STAINLESS STEEL SPRAY HEADS

Our complete stainless steel spray heads are best suited to resist corrosion and abrasion by the harsh waters often found in mining and construction environments. Stainless steel's resistance to corrosion and durability along with low maintenance make Mega stainless steel spray heads the ideal spray head for the toughest environments. This is an optional feature.



Mega Spray Heads Valves are FULLY Adjustable!

Mega spray heads are adjustable and can be fine tuned to provide the optimal water distribution for a specific application. This allows for high efficiency, reduced water consumption, and prevention of roadway over watering.












Spray Capability


Mega spray head valves are fully adjustable for fan width, fan volume, and fan direction. When combined with swivels (see optional features) on the spray bar, fan direction can be adjusted on two axis. Mega spray heads provide a consistent flat fan spray over a very wide area. One or two spray heads are capable of suppressing dust on a road up to 27 meters (90 feet) wide.

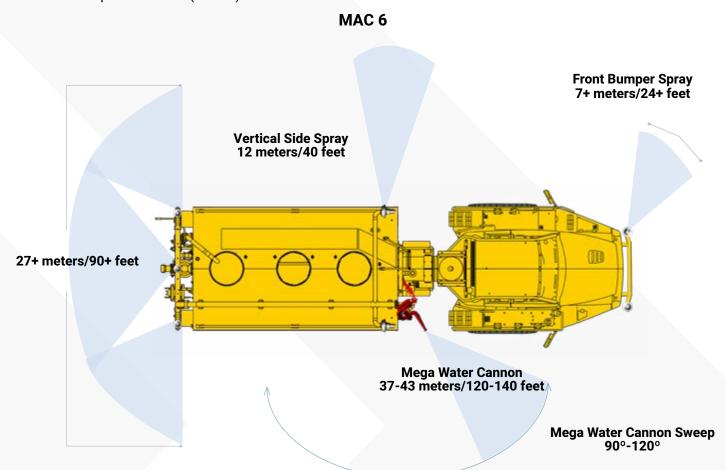

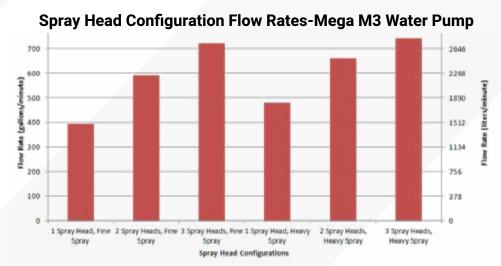

Total flow rates of different spray head configurations. The approximate total flow rates in gallons/minute (left vertical axis) and liters/minute (right vertical axis) of three possible spray head configurations. The "fine spray" opening is ¼ inch in height, and the "heavy spray opening" setting is ¾ inch in height.

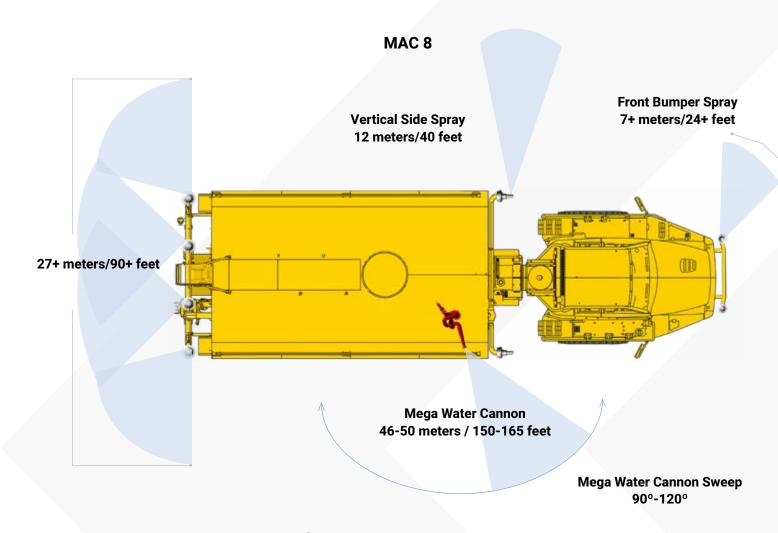

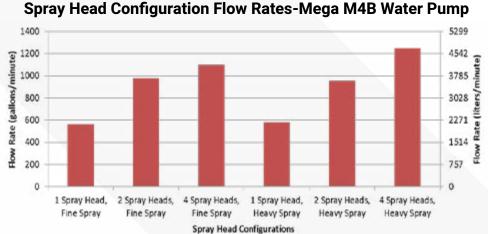

Total flow rates of different spray head configurations. The approximate total flow rates in gallons/minute (left vertical axis) and liters/minute (right vertical axis) of four possible spray head configurations. The "fine spray" opening is ¼ inch in height, and the "heavy spray opening" setting is ¾ inch in height.





ACCESS LADDER WITH HAND RAILS

Mega tanks include an access ladder to the top of the tank. Our standard ladder features tread grip rungs for a sure-footed grip and hand rails at the top of the ladder allowing safe access to the top of the tank. Optional customized safety railing is available upon request to meet your exact requirements.



ACCESS PORTS

Access ports provide additional access to the interior of the tank beyond the standard access provided through the fill port. This provides multiple points of access to internal tank compartments and includes internal ladder rungs on both sides of tank. Availability varies by model.



ACCESS MANWAYS

Larger Mega tanks include access manways through the main transverse baffles of the tank.




CAMERA RELOCATION MOUNTING PROVISION

A camera mounting bracket to relocate the camera from the truck to the water tank.




DIRECT PIN MOUNTING WITH LINE-BORED HOLES

Mega tanks pin directly to the rear pivot mounts of the truck chassis. Line boring the rear pivot mounts ensures accurate direct pin installation of the tank. Mega tanks do not require welding to the frame. New pivot pins and shims are supplied with the tank.




EXTERIOR PAINT

Mega tanks are abrasive blasted prior to application of anti-corrosive primer. The exterior top coat is color matched to the current manufacturers color. *Custom graphics are available upon request.*



EXTERNAL WATER LINES

External waterways feeding front spray, vertical side spray, and water cannon are external to the tank. *Available on MAC 5 and 6 only.*



FILL PORT WITH SAFETY GRATE AND ANTI-SKID WALKWAY

The standard fill port includes a bolt-in safety grate. For safer access to the fill port, an antiskid walkway is provided. The walkway extends from the access ladder on the front bulkhead to the fill port.




FLEXIBLE TANK MOUNTING

The truck chassis is allowed to flex beneath the spring type front mounting tie downs. No welding is required to install these mounts.



HYDRAULIC OIL COOLER

The hydraulic oil cooler helps prevent overheating during extended water pump operation.




INTERNAL WATER LINES

Internal waterways feeding front spray, vertical side spray, and water cannon are external to the tank. *Available on MAC 7, 8, 9 and 10 only.*



LED LIGHTING AND UTILITY LIGHTS

All clearance, stop, and tail lights on Mega tanks are LED for long life and low maintenance. Two work lights are mounted on the rear bulkhead of the tank beneath water shedders. The lights are controlled by switches on the cab control.



MUD FLAPS

Mud flaps fore and aft of rear drive tires are standard equipment on all Mega tanks.



ONE-YEAR WARRANTY

Mega protects your investment by providing a one-year warranty against defects in materials and workmanship. Extended warranties are available for purchase.



REAR SPRAY BAR WITH SPRAY HEAD VALVES

The rear spray bar is designed to fully utilize the capability of the water pump. The standard rear spray bar is constructed of carbon steel pipe. *Optional stainless steel spray bars and spray heads are available as well as swivel couplings. See our optional features.*



TECHNICAL MANUALS

Mega water tanks include a complete set of technical manuals detailing installation, operation, maintenance, inspection and replacement parts. Additional manuals are available for purchase.

11 12

OPTIONAL FEATURES

Optional features for Mega Articulated Truck Tanks are subject to change and can vary by the type or model of tank. Availability of features may also vary by model. If you have any questions please contact your Mega sales representative at 505-345-2661 or toll free at 1-800-345-8889.

QUICK REFERENCE DIRECTORY	HM300 MAC	MAC MAC
	6	8
Additional Technical Manuals	-	/
Adjustable Stream Nozzles (Requires Water Cannon)	'	/
Anti-Siphon Fill Pipe	/	~
Camera Relocation Cable	~	~
Conical Fill	✓	/
Corrosion Resistant Package		~
Digital Spray Control System-DiSCS®*	/	
Drain Valve	/	~
Dump Bar	/	~
Factory Installation	/	~
Fall Protection Tie-off Points	/	~
Foam Agent System (Requires Water Cannon)	/	~
Front Bumper Spray (Special Request)	/	~
Hose Reel	/	~
Interior Coatings (Epoxy or Urethane)	/	~
Magnesium Anodes	/	~
On-site Assistance	/	~
Quick Change Components Package (QCCP)	/	/
Stainless Steel Spray Heads	/	/
Self Loading	/	~
Swivel Couplings on Rear Spray Bar	/	~
Vertical Side Spray	/	/
Water Cannon	/	/

^{*} Please go to our standard section for DiSCS® information.



FACTORY INSTALLATION

Mega offers complete factory installation for articulated truck tanks for both customer-supplied and Mega-provided tractors. Factory installation includes complete testing prior to delivery.



ADDITIONAL TECHNICAL MANUALS

Additional sets of manuals are available for purchase. Mega water tanks include a complete set of technical manuals detailing installation, operation, maintenance, inspection and replacement parts.



ANTI-SIPHON FILL PIPE

The anti-siphon fill pipe is used with any pressurized water source. It is specifically designed to accommodate municipal water systems and fire hydrants requiring an air gap to prevent water siphoning back into the supply.



CAMERA RELOCATION CABLE

An extension cable to relocate your camera from the truck to the water tank.





MEGA WATER CANNONS

Mega's water cannons are designed and built to perform in the most severe environments of mining and construction. Capable of water pressures and flows required for the mobile water equipment industry, Mega's water cannons are ideal for fire suppression, high pressure equipment washing, and most applications that require long-distance, and/or concentrated spray.

Specialty Nozzles

Mega's hydraulic water cannons can be fitted with a variety of adjustable nozzles to customize the spray pattern and distance. In addition to the standard straight bore nozzle, Mega offers fan to stream, fog to stream with foam eduction, and fog to stream nozzles. For more nozzle options please visit our website or ask your Mega sales representative for more information.

Adjustable Stream Nozzles (Fan or Fog)

Remote control hydraulic fan or fog stream nozzles allow adjustable stream patterns for use with Mega water cannons. *This option requires the purchase of the Mega Water Cannon.*



Foam Agent System


The foam agent system is compatible with any class of foam that can be nozzle-aspired. This system can be used for fires suppression or other air-aspirated foam applications. The system consists of a stainless steel (316 grade) foam concentrate tank, water cannon, and foam eduction nozzle. Our medium-expansion nozzles allow for adjustable foam percentages of 1%, 3%, 6%, and 10%, and possible flow rates of 350, 500, and 750 GPM.




The Mega foam tank is mounted externally on the water tank and is available in the following gallon sizes: 60, 120 and 200. Mega's foam agent system can be ordered as an option on a new Mega water tank or be purchased as a retro-kit installed to on an existing water tank.



60 gallon External Foam Tank



120 gallon External Foam Tank



200 gallon External Foam Tank

HOW MEGA CAN HELP YOU OPTIMIZE YOUR WATER APPLICATIONS



Over-watering of haul roads has been the subject of increased study by mine planning and safety personnel. Many mines have improved their efficiency, lowered resource and equipment maintenance costs, and improved the safety of their working conditions by employing water conservation practices.



> SAFETY

Excessive watering of roadways decreases effective tire traction, increases braking distances, destabilizes fill slopes, and accelerates erosion. This places haulage truck operators at a higher risk of accidents.



> WATER WASTE

Water conservation is extremely important, particularly in drier climates where water is already a scarce and precious resource. Many governments have implemented strict regulations concerning water usage, and require mines to develop and adhere to a water conservation plan.



LABOR AND RESOURCES Over-watered, eroding haul roads must be serviced and repaired more frequently. When using too much water, trucks are required to return to water fill stations more often. This wastes both fuel and man-hours as well as subjecting the over-watered roads to heavier traffic.



> TIRE WEAR

Well-maintained haul roads will have a compacted top layer of fine-cushioning particles protecting tires from the larger coarse, sharp rocks below. Over-watering erodes this protective top layer, subjecting tires to severe wear by the exposed coarse rocks. This is costly in terms of tire replacement, lower production rates and higher labor hours.




We understand that our most precious natural resources are limited. Water conservation is essential for reducing waste and for safe road conditions, which is why we emphasize efficient water usage methods and equipment.



CONICAL FILL

The Conical Fill allows for easier positioning of the water fill source over the main fill port of the tank.



Drain Valve

The quick dump option is a large drain located at the bottom rear of the tank. This option is available either manually or hydraulic remote actuated for MAC6 as 101 mm/4 inch diameter and for MAC 7 and MAC8 as a 203 mm/8 inch diameter.



DUMP BAR

Mega offers two hydraulically-actuated dump bars. Mega's pressurized dump bar sprays penetrating jets of water directly onto the ground. The gravity dump bar is fed directly from the bottom of the water tank and may be used with the water pump turned off to reduce water flow and pressure.



FALL PROTECTION TIE-OFF POINTS

Multiple fall protection, D-ring style tie-off points are welded to the top of tank.



FRONT BUMPER SPRAY KIT

The front bumper spray is commonly used to "sweep" a surface with high pressure fans of water. Spray heads are mounted to spray from both sides of the tractor. The spray heads are fully adjustable for vertical and horizontal directions. The location of the spray bar allows the truck hood to fully tilt and open for engine service. Front bumper spray may restrict cab access. *This item is available by special request.*



HOSE REEL

Hose reels installed on Mega tanks include a high quality water hose and an adjustable fog to stream nozzle. Hose reels come in various sizes and are available with manual, spring, or hydraulic rewind. Sizes vary by model.



MAGNESIUM ANODES

Magnesium anodes are placed in each tank compartment to reduce corrosion of the tank interior.


ON-SITE ASSISTANCE

The Mega Product Support team offers on-site technical assistance, service advice and training to facilitate implementation and help reduce field assembly and component repair time.



SWIVEL COUPLINGS ON REAR SPRAY BAR

Optional swivel couplings allow for vertical spray direction adjustment. Each spray head rotates horizontally to adjust water spray fan direction.



VERTICAL SIDE SPRAY

Two spray head valves are mounted on the front quadrant of the tank for spraying vertical fans of water.



QCCP-QUICK CHANGE COMPONENT PACKAGE

Quick change component packages provide specific operation-critical parts for the Mega water tank spray system. Stocking critical parts reduces downtime by eliminating delays related to acquiring replacement parts. QCCP kits are designed specifically for each tank configuration. Contact your Mega dealer for complete parts kit list details or contact your Mega sales representative at 1-800-345-8889 for more information.







BUY PARTS ONLINE


www.megacorpinc.com

PARTS AND PRODUCT SUPPORT AVAILABLE 24 HOURS A DAY, SEVEN DAYS A WEEK. Product Support 505.345.2661 • U.S. 1.800.345.8889 • After Hours & Weekend 505.345.6988

SELF-LOADING CAPABILITY


MAC 6

Mega MAC water tanks feature optional self-loading ability via the discharge pump. Unique to Mega is a built in priming reservoir inside the water tank that floods the suction line with water when the valving is switched to load the tank. An auxiliary manual priming pump is also included. *Optional suction hoses can be ordered separately.*

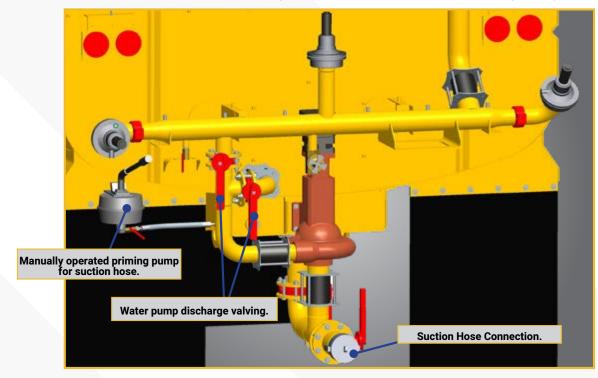

MAC 7 and 8

Mega's larger MAC water tanks also feature an optional self-loading capability via a separate pump station. The additional water pump is powered hydraulically by diverting hydraulic power from the discharge water pump via a manual diversion valve. The option includes two suction hoses, foot valve, and hose storage tubes.

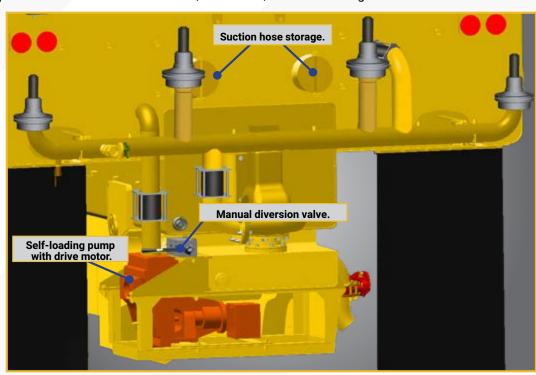



SOLUTIONS FOR CORROSIVE ENVIRONMENTS

The Corrosion Resistant package protects against tank and component corrosion caused by the harsh waters often found in mining, construction and landfill environments. Protecting your tank against corrosion adds longevity and dependability to your tank and spray system. *Corrosion resistant package not available on MAC 5 and 6 models.*

The package consists of:

- · Stainless steel spray bar
- Stainless steel spray head valves
- Corrosion resistant Mega M4 water pump with stainless steel waterways
- Stainless steel internal piping
- Stainless steel solenoid control module enclosure mounted on front bulkhead of tank



STAINLESS STEEL SPRAY HEAD

The Mega stainless steel hydraulic spray head valve is engineered for use in the most severe environments. The stainless steel hydraulic spray head valve is interchangeable with the Mega aluminum hydraulic spray head valve. Mega hydraulic spray head valves are actuated by a stainless steel, double-acting hydraulic cylinder.



CORROSION RESISTANT MEGA WATER PUMP

The Mega M4 series corrosion resistant water pump features a centrifugal pump manufactured with a stainless steel volute case, packing mount, and impeller. All surfaces that are in continuous contact with water utilize stainless steel construction.



COMPLETE STAINLESS STEEL MEGA WATER PUMP

The Mega M4 series complete stainless steel water pump features a centrifugal pump manufactured with a stainless steel frame, volute case, shaft, and impeller. It is designed for maximum life in corrosive applications.



INTERIOR COATINGS (EPOXY AND URETHANE)


Mega tanks are abrasive blasted prior to the application of the interior coating. The epoxy lining is well suited for harsh, acidic, alkaline, and salty waters. Urethane lining is very effective in normal to salty waters. *Coating data sheet and MSDS available upon request.*

SHIPPING DIMENSIONS

All weights and dimensions are subject to change. Tank weights and specs are given without water in the tank. Tank specifications are available for earlier models-please contact Mega Sales for more information.

MODEL	CHASSIS CONFIGURATION	TANK SIZE	OVERALL LENGTH	OVERALL HEIGHT B	OVERALL WIDTH C	TANK WEIGHT
MACE LIMOOO	SWB-Standard Wheel Base	23,000 liters	10,998 mm	4,496 mm	2,921 mm	21,000 kg
MAC6 HM300	SWB-Standard Wheel base	6,000 gallon	433 in	177 in	115 in	46,300 lbs
NAAOC LINAOOO ED:	SWB-Standard Wheel Base	23,000 liters	10,795 mm	4,419 mm	2,908 mm	
MAC6 HM300 FB*	Flat Bottom	6,000 gallon	425 in	174 in	114.50 mm	2,921 mm 21,000 kg 115 in 46,300 lbs 2,908 mm 14.50 mm
NAA OO LINAAOO	OVAID Of an dead VAII- and Dead	32,000 liters	11,785 mm	4,826 mm	3,454 mm	46,300 lbs 28,513 kg
MAC8 HM400	SWB-Standard Wheel Base	8,700 gallons	464 in	190 in	136 in	62,900 lbs

^{*} FB-Flat Bottom

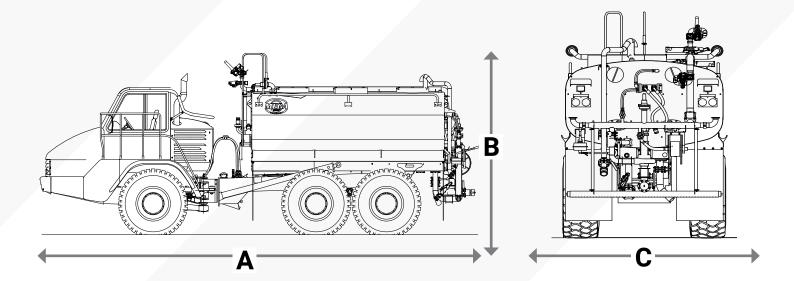


Drawings do not represent all tank models. Optional features vary.

TANK ONLY SHIPPING DIMENSIONS

All weights and dimensions are subject to change. Tank weights and specs are given without water in the tank. Tank specifications are available for earlier models-please contact Mega Sales for more information.

MODEL	CHASSIS CONFIGURATION	TANK SIZE	OVERALL LENGTH	OVERALL HEIGHT B	OVERALL WIDTH C	TANK WEIGHT
MAC6 HM300	SWB-Standard Wheel Base	23,000 liters	5,766 mm	2,921 mm	2,921 mm	5443 kg
		6,000 gallon	227 in	115 in	115 in	12,000 lbs
MAAOC LIMOOO ED:	SWB-Standard Wheel Base	23,000 liters	6,502 mm	3,023 mm	2,908 mm	5,701 kg
MAC6 HM300 FB*	Flat Bottom	6,000 gallon	256 in	119 in	114.50 mm	12,600 lbs
MAC8 HM400	SWB-Standard Wheel Base	32,000 liters	7,163 mm	7,163 mm	3,429 mm	8459 kg
		8,700 gallons	282 in	110 in	135 in	18,650 lbs

* FB-Flat Bottom

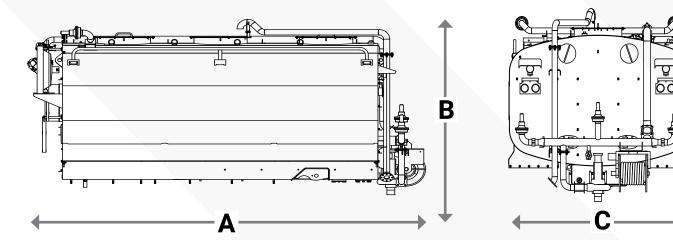

Drawings do not represent all tank models. Optional features vary.



We reach out **GLOBALLY** to take care of **YOU**

Wherever you are in the world, we're here to ensure you get the highest quality, most effective, and durable specialty haulage products in the industry. Mega is responsible for the design, development, manufacturing, marketing, and sale of products used in surface mining and construction projects worldwide.

Mega's products include all varieties of water haulage equipment, elevating scrapers, coal haulers, bottom-dump trailers, equipment transports, specialty dumper bodies, mobile pumps, stand tanks, parts, service and technical support. Mega's products are manufactured at its headquarters in Albuquerque, New Mexico, U.S.A. as well as by its partners in Chile, Colombia, India, South Africa, India and Australia.

Parts and Product Support available 24 hours a day, Seven Days a week.



PRODUCT SUPPORT AFTER HOURS & WEEKEND

Saturday-Sunday 505.341.6988 Direct



OFFICE HOURS

Monday-Friday 7am-5pm 505.345.2661 Office 800.345.8889 U.S. Toll Free




PARTS SALES AFTER HOURS & WEEKEND

> Saturday-Sunday 505.918.7271 Direct


SCAN TO VISIT OUR PRODUCT SUPPORT WEB PAGE

Meet your **MEGA** team!


EQUIPMENT SALES




KEN KNOTTS Regional Sales Manager kknotts@megacorpinc.com 505.322.9770



JOHN STUBBS Regional Sales Manager istubbs@megacorpinc.com 505.259.5975



DYLAN F. THOMAS Director of Sales & Marketing dthomas@megacorpinc.com 505.850.9800



Chief Development Officer/ **Engineering Manager** jkunz@megacorpinc.com 505.345.2661



CLAUDIO CÓRDOVA M. Independent Sales Rep. Latin America ccordova@megacorpinc.cl 011.56996476128



JESSICA M. MANZANARES Regional Sales Manager imanzanares@megacorpinc.com msmith@megacorpinc.com 505.341.6979



MEAGHAN SMITH Sales Support Coordinator 505.341.6993



BETZAIDA RUIZ Senior Graphic Designer bruiz@megacorpinc.com 505.341.6966

PARTS SALES & PRODUCT SUPPORT



IZAYAH BRITO Parts Sales Representative ibrito@megacorpinc.com 505.998.6502



JOSE BARRAZA Parts Sales Representative jbarraza@megacorpinc.com 505.341.6969




NORM REDENSHEK Director Process Control, Product Support & Parts Sales nredenshek@megacorpinc.com 505.235.4650



BILL TAYLOR Product Support Sales Representative btaylor@megacorpinc.com 505.341.6988



JEFF GUY Product Support Sales Representative iguy@megacorpinc.com 505.341.6989



KEVIN LEE Technical Writer klee@megacorpinc.com 505.341.6996





